


Iridium 9523 Integration Board (Raspberry Pi Form Factor) Technical Specifications

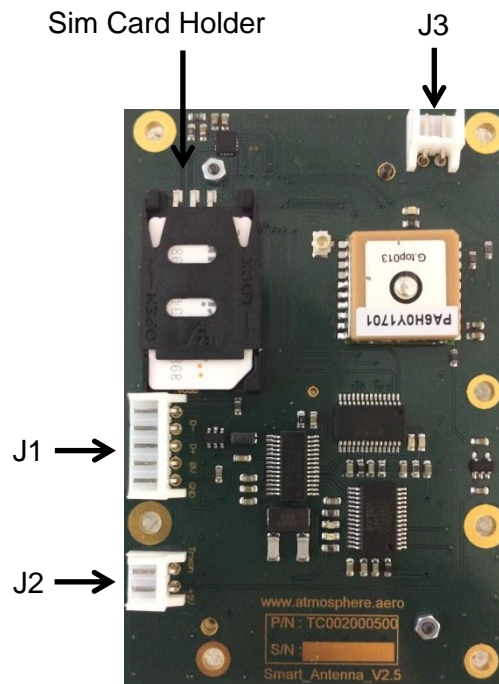

Functional Description

The Iridium 9523 Integration Board TC002 is a Raspberry Pi format card which enables to integrate Iridium Modem 9523 with its sim card holder. This board offers the possibility to add an Iridium antenna. It also includes a GPS receiver for timing and location.

Application

The Iridium Integration Board is designed for use of Iridium data connectivity in embedded applications. Additional software package enables IP connectivity with QoS management on Iridium 9523.

Mechanical Characteristics

Raspberry Pi Format (85 x 56mm), 80g

Order Information

ATMOSPHERE Sarl (France),
 14 Avenue de l'Europe,
 31520 Ramonville
 Tel : +33 (0) 567733863
 Mail : contact@atmosphere.aero
www.atmosphere.aero

ATMOSPHERE GmbH (Germany),
 Argelsrieder Feld 22,
 82234 Wessling
 Tel: +49 (0) 8153 88678-255

J1 – USB Connector

Connector: JST, S5B-EH, 5-way.

Mating Socket: JST, EHR-5, 5-way.

Pin No.	Signal Name	Signal Function
1	+5V	+5V (USB)
2	D-	Data – (USB)
3	D+	Data + (USB)
4	0V	Ground (USB)
5	GND	Shield

J2 – Power Connector (VBat, Trxon)

Connector: JST, S2B-EH, 2-way.

Mating Socket: JST, EHR-2, 2-way.

Pin No.	Signal Name	Signal Function
1	Trxon	Enable modem power regulators
2	VBat	+5V (Voltage source)

J3 – Power Connector (Vboost)

Connector: JST, S2B-EH, 2-way.

Mating Socket: JST, EHR-2, 2-way.

Pin No.	Signal Name	Signal Function
1	VBoost	10.5 – 32V (Boost voltage for transmission)
2	GND	Ground